


The Dialogic® Brooktrout® TruFax® Fax Boards offer small businesses and departmental workgroups dependable network fax capabilities. These intelligent fax boards support a variety of applications, such as fax server and workflow fax, and offer enterprise-level quality and performance to small businesses.

#### Products Discussed in This Datasheet

- Dialogic® Brooktrout® TruFax® 100 Fax Board
- Dialogic® Brooktrout® TruFax® 200 Fax Board
- Dialogic® Brooktrout® TruFax® 250 Fax Board
- Dialogic® Brooktrout® TruFax® 400 Fax Board
- Dialogic® Brooktrout® TruFax® 450 Fax Board

Dialogic delivers time-tested, industry-leading fax technology, offering a broad range of fax and fax over IP products, which are supported by more than 50 software partners and approved for use in more than 40 countries (as of 2008).

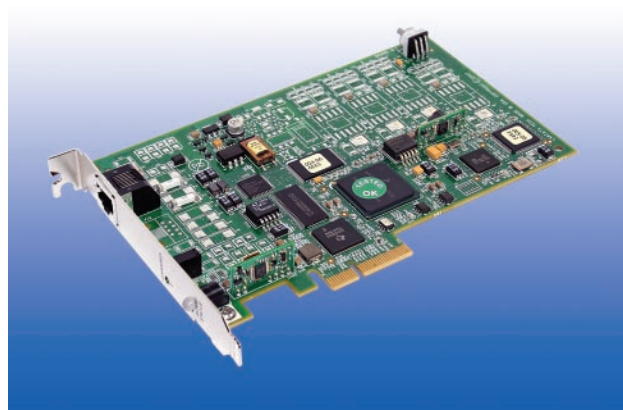

Large Logo

## Features

**Dialogic® Brooktrout® Adaptive Call Progress provides a built-in library of communications algorithms for the identification of and adaptation to various fax machines and line conditions**

**Purpose-built**

**Fax-only modulation**

**Error Correction Mode (ECM) – TruFax 250 and TruFax 450 models only**

**Modified Modified Read (MMR) compression algorithm -- TruFax 250 and TruFax 450 models only**

**Onboard fax protocol processing**

**Plug and play**

## Benefits

Provides compatibility, high rates of connectivity, and high transmission speeds across a wide range of fax machines and telephone line conditions

Leverages advanced fax algorithms and dedicated fax-processing power, offering performance and reliability benefits in comparison to Class 1 and Class 2 fax modems and multipurpose telephony adapters

Drops all non-T.30 packets, eliminating possible security issues related to non-T.30 packets

Allows high first-attempt transmission rates

Can reduce transmission time from 200% to 300%

Medium Logo

Can lower a fax server's CPU utilization and improve overall system performance

Easy installation and configuration

Available in several configurations, Brooktrout TruFax Fax Boards provide up to four channels per board for dedicated send-and-receive-channel configurations. One-channel analog and two-channel BRI configurations are suitable for customers who have occasional faxing needs, but still require a very reliable fax solution. The two-channel analog and four-channel BRI configurations are generally used in network fax solutions. If Brooktrout TruFax Fax Boards are configured to send and receive faxes through separate channels, the fax solution can receive faxes in one channel and send faxes from the outbound job queue in another channel.

Table 1 lists the Brooktrout TruFax Fax Board models and some of their features. As of 2008, the ISDN telephony interface can be used in Europe and Japan.

Models	Channels	Interface	Microsoft® Shared Fax	Adaptive Call Progress	ECM	MMR
TruFax 100	1	Analog	x	x		
TruFax 200	2	Analog	x	x		
TruFax 250	2	BRI ISDN		x	x	x
TruFax 400	4	BRI ISDN		x		
TruFax 450	4	BRI ISDN		x	x	x

Table 1. Dialogic Brooktrout TruFax: Models and Features

## Technical Specifications

### Hardware

**Note:** Dialogic® Brooktrout® TruFax Fax Boards are not compatible with Dialogic® Brooktrout® TR1034 Fax Boards in the same chassis.

### Analog

CPU: PowerPC 8241 @ 200 MHz

DSP: TI C5402 (61 MIPS total)

Network interface: 1 or 2 ALS

Signaling: FCC part 68 and TBR21

Physical: Half-size 6.6 in. long x 4.376 in. wide, 33 MHz PCI 2.2 universal card (3.3/5 V signaling)

Power: 5 W

Up to 4 boards per server

### BRI

CPU: PowerPC 8241 @ 200 MHz

DSP: TI C5402 (61 MIPS total)

Media channels: Up to 4 V.17 fax

Network interface: 1 or 2 BRI

Signaling: ISDN BRI, Euro, Japan

Physical: Half-size 6.6 in. long x 4.376 in. wide, 33 MHz PCI 2.2 Universal card (3.3/5 V signaling)

Power: 5 W

Up to 4 boards per server

### Environmental

Temperature: 0° – 50°C operational

Humidity: 10% – 95% (non-condensing)

## Technical Specifications *(continued)*

### Fax

Up to 14.4 kbps with auto fallback

ITU T.30; Group 3

Analog: V.17, V.27, V.29, V.33 modulation

BRI: V.17, V.27ter, V.29 modulation

Normal and fine resolution: 100x200, 200x200

Analog-MH and MR compression, BRI-MH, MR compression; 250 and 450 BRI- MH, MR, and MMR compression plus ECM

Onboard image conversion

A4 page size

Format conversion “on-the-fly”: ASCII, TIFF-F call progress and call control

Dialing and call progress: Onboard DTMF generation and detection

Adaptive (SIT detection included), pulse, and DTMF

Inbound fax routing capability

### BRI

International call progress and tone detection

Programmable tone and cadence detection/generation

CED, CNG, v.21 modem detection

ANI/DNIS DTMF and MF detection

### Operating System Support

Windows®; Linux. Details at

### Installation and Configuration

Windows® Plug and Play Compliant

### Application Programming Interface

Dialogic® Brooktrout® Bfv API

### Environmental Compliance

This electronic equipment complies with the European Union Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment, Directive 2002/95/EC.

### Support Information

Support information at <http://www.atechnologies.com/products-dialogic.com>

### Approvals

US/Canada, European Union, Iceland, Norway, Switzerland, Australia, Japan, New Zealand, and South Africa

For current certifications and approvals, contact your Dialogic sales representative.

## Ordering Information

The following table provides ordering information for Dialogic® Brooktrout® TruFax® Fax Boards.

Abbreviation	Product Code	Description
Trufax 100-R PCI HALF	901-004-07	1 Channel Loop Start; half-size Universal PCI
Trufax 100-R PCI UK HALF	901-004-09	1 Channel Loop Start; half-size Universal PCI for the UK
TruFax Full Size 100-R Europe	901-002-15	1 Channel Loop Start; Universal PCI
TruFax Full Size 100-R UK	901-002-17	1 Channel Loop Start; Universal PCI
Trufax 200-R PCI HALF	901-004-08	2 Channel Loop Start; half-size Universal PCI
Trufax 200-R PCI UK HALF	901-004-10	2 Channel Loop Start; half-size Universal PCI for the UK
TruFax Full Size 200-R Europe	901-002-16	2 Channel Loop Start; Universal PCI
TruFax Full Size 200-R UK	901-002-18	2 Channel Loop Start; Universal PCI
<b>For sale in UK only</b>		
TruFax 200-R BRI (2B+D)	901-003-07	2 Channel, Single Euro BRI
TruFax 250-R BRI (2B+D)	901-003-08	2 Channel, Single Euro BRI with MMR & ECM
TruFax 400-R BRI (4B+2D)	901-003-09	4 Channel, Dual Euro BRI
TruFax 450-R BRI (4B+2D)	901-003-10	4 Channel, Dual Euro BRI with MMR & ECM

**Note-** Requires Dialogic® Brooktrout® SDK Version 5.0.0 or greater

[www.atechnologies.com](http://www.atechnologies.com)

Advantage Technologies, Inc.  
9 East 38th Street  
New York, NY 10016  
Toll Free: 866-730-1700 | Email: [info@atechnologies.com](mailto:info@atechnologies.com)

Dialogic, Brooktrout, and TruFax are registered trademarks of Dialogic Corporation or its subsidiaries ("Dialogic"). Dialogic's trademarks may be used publicly only with permission from Dialogic. Such permission may only be granted by Dialogic's legal department at the address provided above. Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries. Other names of actual companies and products mentioned herein are the trademarks of their respective owners.

Dialogic encourages all users of its products to procure all necessary intellectual property licenses required to implement their concepts or applications, which licenses may vary from country to country. None of the information provided in this datasheet other than what is listed under the section entitled Technical Specifications forms part of the specifications of the product and any benefits specified are not guaranteed. No licenses or warranties of any kind are provided under this datasheet.

Dialogic may make changes to specifications, product descriptions, and plans at any time, without notice.